


Fitting of Mechanical Grapple

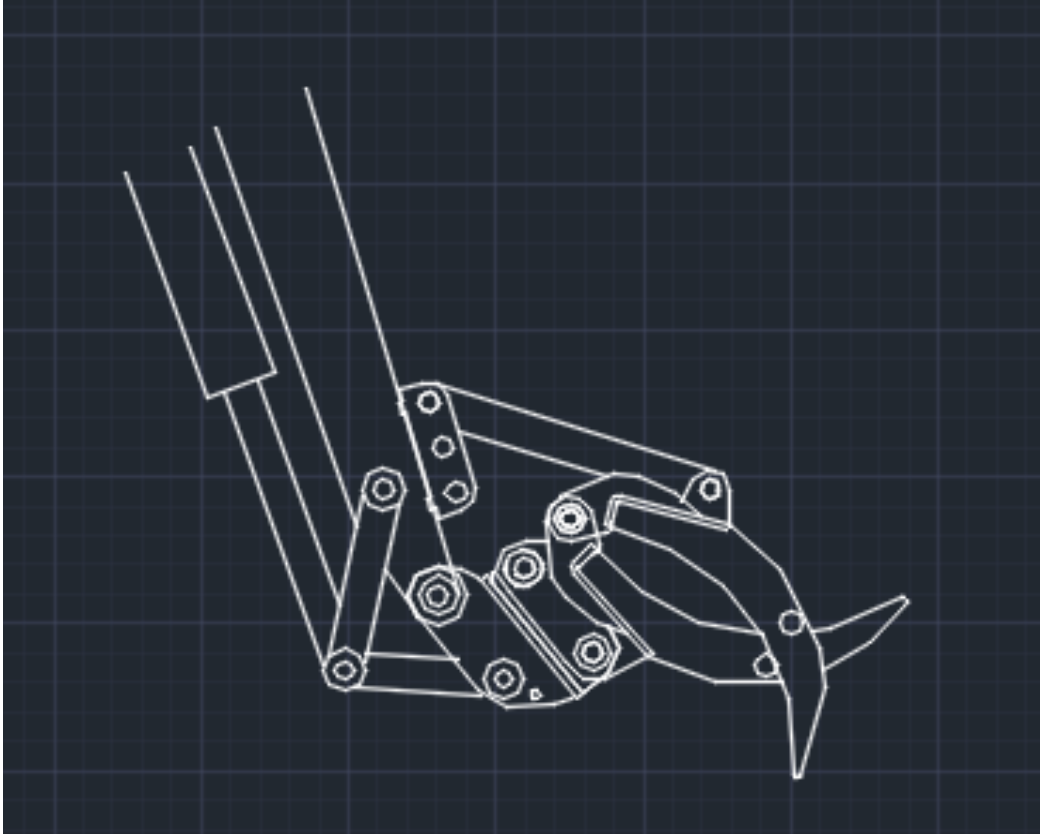

- Attach the grapple to your quick hitch.
- Connect the connecting rod to the grapple.
- Extend the tipping ram **fully**.
- Connect the pad to the connecting rod. (As shown in image)
- Tack welds to the pad in the normal position.
- Check the operation in the middle hole of the pad.
- If all is ok, fully weld the pad.